


18,000 BTUH MODEL


Model # 18,000 BTUH 230V



Front

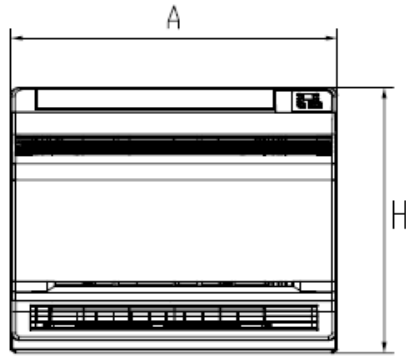

Side

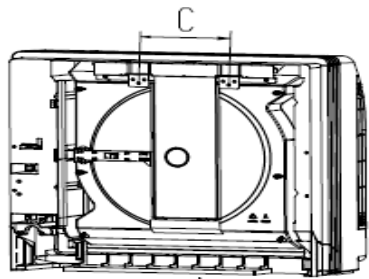


Back

Dimensions

	A	B	C	H
(mm)	700	215	200	600
(inches)	27.6	8.5	7.875	23.6

Note: Size refrigerant lines based on evaporator port

MINIMUM CLEARANCES

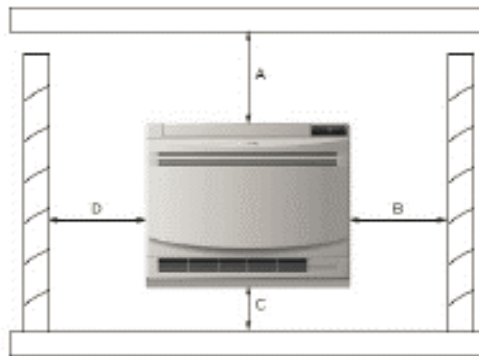

MINIMUM INDOOR CLEARANCE inches (mm)

A	B	C	D
60 (1524)	24 (610)	6 (152)	24 (610)

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.