



TQSDT

T-UNIX

TQSDT

DC DIRECT DRIVE AIR HANDLER

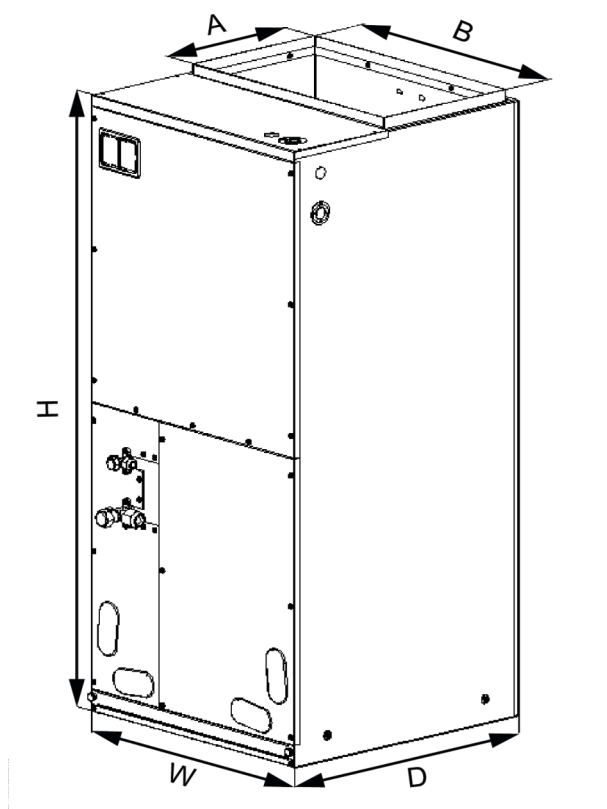
Model:

TUD60-24AH2ADU



Air Handler		
Model		TUD60-24AH2ADU
Performance		
Cooling Rated Capacity	Btu/h	54,000
Heating Rated Capacity	Btu/h	54,000
Airflow	cfm	1600
Sound Rating	dB(A)	51
Electrical		
Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
Voltage Range	V	187~253
MCA	A	4
MOP	A	15
Control Voltage	V	24
Blower Motor		
Type		DC Direct Drive
Speed Max	rpm	930
Power Output	hp	1
Full Load Amp(FLA)	A	5
Blower		
Type		Centrifugal
Wheel Diameter	in	10-7/8
Wheel Height	in	11-1/4
Filter, Coil and Refrigerant		
Disposable Filter Size	in	20 x 20 x 1
Coil Area	sq ft	5.49
Fins per Inch(FPI) - Rows		14 - 4
Expansion Valve	Qty	1
Refrigerant Type		R410A
Pipe Connection Size - Liquid	in	3/8
Pipe Connection Size - Suction	in	3/4
Pipe Connection Type		Flare or Solder
Condensate Drain Size	in	1
Dimension and Weight		
Dimensions(W x D x H)	in	24-3/4 x 21-1/4 x 57
Net Weight	lb	203

Job Name:		Date:	
Reference #:			
Signature:			

**TQSDT****T-UNIX****TQSDT****DC DIRECT DRIVE AIR HANDLER**

Model #	Dimensions				
	W	D	H	A	B
TUD60-24AH2ADU	24-3/4"	21-1/4"	57"	11-5/8"	20"

