



Submittal Data: TM24H	FDI	24,000 BTU	
Job Name		Location Date	
Purchaser		Engineer	
Submitted To		For Reference Approx	/al Construction
Unit Designation		Schedule No.	
GENERAL FEATURES			
-Quiet Operation -Multi-Speed Fan			
-Medium Static Pressure Capability			
-Slim Line Construction 8" high			
-Internal Condensate Drain Pump			
-Flexible Return Air From Bottom Or Rear			5
-XK-19 Wired Controllers			
-Wireless Remote Controllers			
-Sentry Condensate Overflow Protection			
-Limited 5 yr. Parts Warranty			
Custom Datin	~~	Unite Considiration 9	Data
System Ratin Cooling*	gs	Units Specification &	Data
Rated Capacity	23,800 BTU/H		
Nateu Capacity	23,000 010/11	Wired Controller	XK-19
Heating*		Wiled Controller	AIX-17
Rated Capacity	27,400 BTU/H		
Nation Supposity	27,400 010/11		
Sound Pressure (Hi/Lo)**		Condensate Drain Lift (Height)	18-in
Cooling	42/34 dbA	Contaction Draw Ent (Froignly	457-mm
Heating	42/34 dbA		
,g	,	Drain Size (OD)	1.0-in
Air Flow (min/max)			26-mm
Indoor Fan	324/589 CFM		
Ext Static Pressure (max/min)	0.040/0.035 inch wg		
Electrical Rati	ngs	Refrigerant Piping I	Data
		D. C	D.110.4
Fan Motor	404	Refrigerant Type	R410A
Output Power	124 W	Con Pina Cina (OP)	E/0.1
FLA	0.54 A	Gas Pipe Size (OD)	5/8-in
Power Supply		Liquid Pipe Size (OD)	3/8-in
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz	Liquid File Size (OD)	3/8-111
Voltage Range	187 - 253 V	Connection Method	Flared
MCA	107 - 253 V 1.0 A	Some chon wethou	riareu
Interconnecting Cable Wire Size	14-4 AWG		
The source of the state	14-4 AVIO	* Test conditions are based on AHRI 210/240.	
		**Sound Power ratings are per AHRI 270 and AHR	RI 350
		2001.0 For Tutings are per Arrivi 270 and Arri	

CERTIFIED Way abridirectory org

24,000 BTUH MODEL

Model # 24,000 BTUH 230V

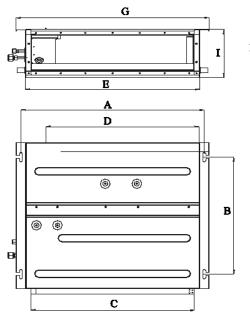



Note: Size refrigerant lines based on evaporator port sizes.

Dimensions


	Α	В	С	D	E	F	G	Н		J
(mm)	1124	491	1062	1020	1100	615	1182	156	200	635
(inches)	44.3	19.3	41.8	40.2	43.3	24.2	46.5	6.1	7.9	25.0

Weight (Net/Gross)

68/90 lbs

INDOOR FAN PEFORMANCE DATA

WG = inches of water guage

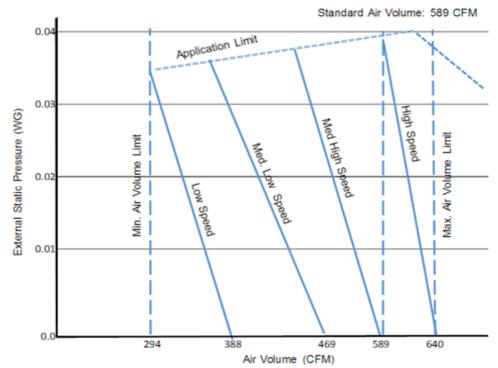

Notes:

- 1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
- 2. Power wiring cable size must comply with applicable national and local codes.
- 3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.