
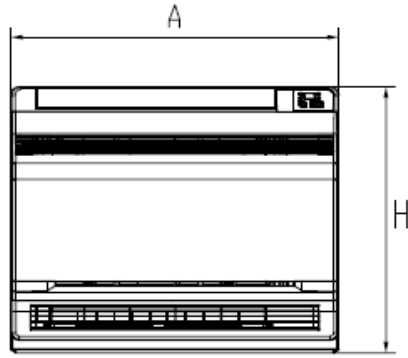


Submittal Data: TM12HEDI		12,000 BTU	
Job Name	Location	Date	
Purchaser	Engineer		
Submitted To	For	<input type="checkbox"/> Reference	<input type="checkbox"/> Approval <input type="checkbox"/> Construction
Unit Designation	Schedule No.		
GENERAL FEATURES -Quiet Operation -Multi-Speed Fan -Swing Louvers -Wireless Remote Controllers -Remote Control Lockout -Limited 5 yr. Parts Warranty			
System Ratings		Physical Specifications	
Cooling* Rated Capacity 11,946 BTU/H		Unit Dimensions (LxHxD)	27.5 x 24.0 x 8.5 -in 700 x 600 x 215-mm
Heating* Rated Capacity 12,969 BTU/H		Weight (Net/Shipping)	33/40 LBS
Sound Pressure (Hi/Lo)** Cooling 42/27 dbA Heating 42/27 dbA		Drain Size (OD)	0.67-in 17-mm
Air Flow (max) Indoor Fan 353 CFM			
Electrical Ratings		Refrigerant Piping Data	
Fan Motor Output Power 30 W FLA 0.36 A		Refrigerant Type	R410A
Power Supply Normal Operational Voltage 208/230 V, 1 Phase, 60 Hz Voltage Range 187 - 253 V MCA 1.0 A Interconnecting Cable Wire Size 14-4 AWG		Gas Pipe Size (OD)	3/8-in
		Liquid Pipe Size (OD)	1/4-in
		Connection Method	Flared
		* Test conditions are based on AHRI 210/240.	
		**Sound Power ratings are per AHRI 270 and AHRI 350	



12,000 BTUH MODEL


Model # 12,000 BTUH 230V



Front



Side

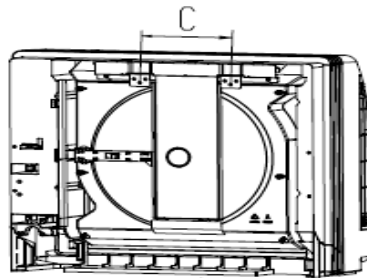


Back

Dimensions

	A	B	C	H
(mm)	700	215	200	600
(inches)	27.6	8.5	7.875	23.6

Note: Size refrigerant lines based on evaporator port sizes.

MINIMUM CLEARANCES

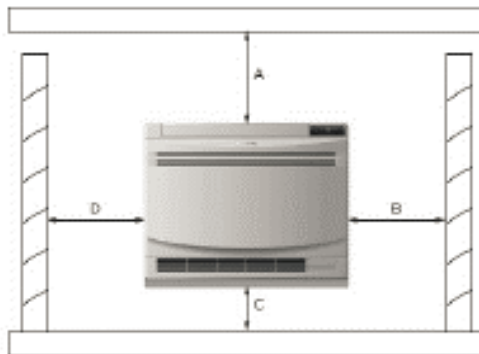

MINIMUM INDOOR CLEARANCE inches (mm)

A	B	C	D
60 (1524)	24 (610)	6 (152)	24 (610)

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.