




# TOSOT

**SPLIT TYPE**

## Ultra Heat GMV6 Mini

**Model:  
GMV-V48WL/C-T(U)**

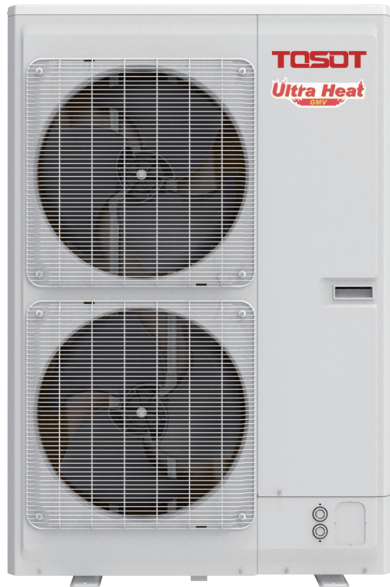

Model		GMV-V48WL/C-T(U)	
Capacity	Cooling	Btu/h	48000
		W	14100
	Heating	Btu/h	48000
		W	14100
Minimum Circuit Ampacity		A	38.8
Maximum Overcurrent Protection		A	40
Power Supply		-	208/230V ~60Hz
Air Volume	m³/h		6600
	CFM		3885
Sound Pressure Level		dB(A)	52
Compressor Type		-	Inverter Rotary
Compressor Quantity		N	1
Refrigerant Oil Model		-	FW68L(FW68DA)
Refrigerant Type		-	R410A
Refrigerant Charge	kg		4.0
	LBS		8.8
Max. Number of Connectable IDUs		unit	8
Gas Pipe	mm		Φ15.9
	inch		Φ5/8
Liquid Pipe	mm		Φ9.52
	inch		Φ3/8
Outline Dimensions(W × D × H)	mm		900 × 340 × 1345
	inch		35-3/8 × 13-3/8 × 53
Packing Dimensions(W × D × H)	mm		993 × 453 × 1500
	inch		39-1/4 × 18 × 59-1/16
Net Weight/Gross Weight	kg		113/124
	LBS		250/270
Operating Temperature Range	Cooling (Outdoor) °C/°F		-5~48 / 23~118
	Heating (Outdoor) °C/°F		-20~27 / -4~81
EER		11 / 11.5	
SEER		19.5 / 22	
HSPF		10.6 / 10.8	
Max. Equivalent Connection Pipe Length		ft	394

**Job Name:**


**Schedule Reference:**

**Date:**

Specification are subject to change without notice.




## Capacity Variation Ratio According to Temperature

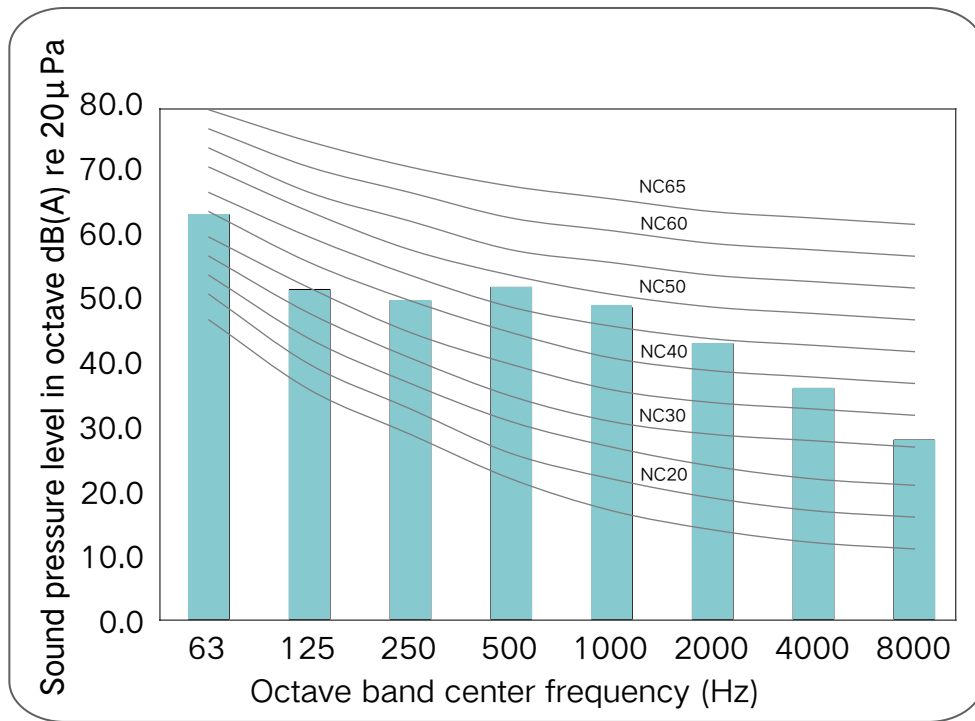



## Outline Dimension Diagram

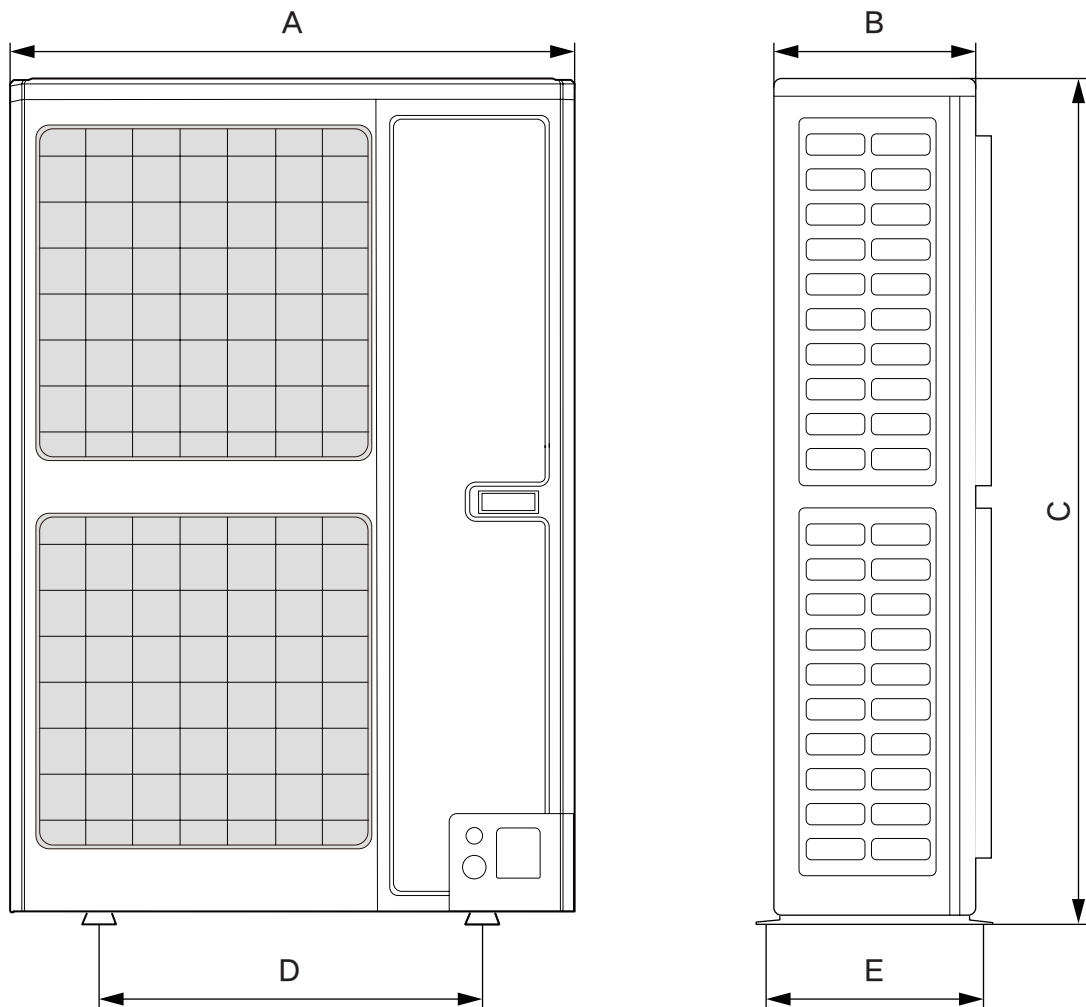

Unit: mm(inch)

Model	A	B	C	D	E
GMV-V48WL/C-T(U)	900 (35-3/8)	340 (13-3/8)	1345 (53)	572 (22-1/2)	378 (14-7/8)