

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SPECIFICATIONS

GMV-ND09TD/A-T(U)

SYSTEM PERFORMANCE			
Cooling	Nominal	Btu/h	9500
	Capacity @95°F	Btu/h	
Heating	Nominal	Btu/h	10500
	Capacity @5°F	Btu/h	
	Capacity @17°F	Btu/h	
	Capacity @47°F	W	
SEER2			
EER2			
HSPF2			
COP @5°F			
COP @47°F			
Cooling Temperature Range		°F	
Heating Temperature Range		°F	
Refrigerant Type			R410A

System Performance Based
on the Connected Outdoor Unit
Performance

INDOOR UNIT			
GMV-ND09TD/A-T(U)			
Air flow (Min-Max)	CFM	235 - 324	
Sound Pressure Level (Min - Max)	dB(A)	28 - 36	
Condensate Drain Size (OD)	in	1	
External Dimensions (WxHxD)	in	38-7/8 x 7 x 15-3/16	
Package Dimension (W x H x D)	in	51-1/2 x 12-3/16 x 19-3/4	
Net Weight	lbs	44	
Gross Weight	lbs	60	

CASSETTE GRILLE (REQUIRED)			
TD01			
Grille Dimension (W x H x D)	in	47-1/4 x 2-3/16 x 18-1/8	
Package Dimension (W x H x D)	in	49-13/16 x 4-3/4 x 21-1/8	
Weight (Net / Gross)	lbs	9.3 / 13.2	

REFRIGERANT PIPING			
Line Set Sized by the Indoor Unit (Liquid - Gas)	in	1/4 - 3/8	

ELECTRICAL			
Power Supply		208-230V / 1Ph / 60Hz	
MCA	A	1	
MOCP	A	15	

SYSTEM FEATURES	
Wired Controller Interface	Yes
WiFi Included	No
Easy Service Access	Yes
Indoor Fan Type	Crossflow
Multi Fan Speeds	3 Speeds
Indoor Unit Display	Yes
Auxiliary Electrical Heater	No
Ventilation (Outdoor Air)	No

REMOTE CONTROLLER FUNCTIONS	
Auto Mode	Yes
Auto Fan	Yes
Auto Swing (Horizontal Auto Swing)	No
Auto Swing - 180° (Vertical Auto Swing)	Yes
Clock	Yes
Dry Mode	Yes
Dry Anti-Mildew (X-Fan) Mode	Yes
Energy Saving Mode	Yes
Dirty Filter Alert	No
Fan Speed Control (7 Speeds)	Yes
I Feel Function	Yes
Privacy Lock	Yes
Quiet Mode	Yes
Room Temperature Display	No
Sleep Mode	Yes
3 Sleep Mode Options	Yes
Timer Mode	Yes
Turbo Mode	Yes
Display On/Off Control	Yes
Freeze Guard Mode	Yes
Power Failure Mode	Yes


DIMENSIONS & CLEARANCES

INDOOR UNIT

Unit: inch

GMV-ND09TD/A-T(U)

DIMENSIONS

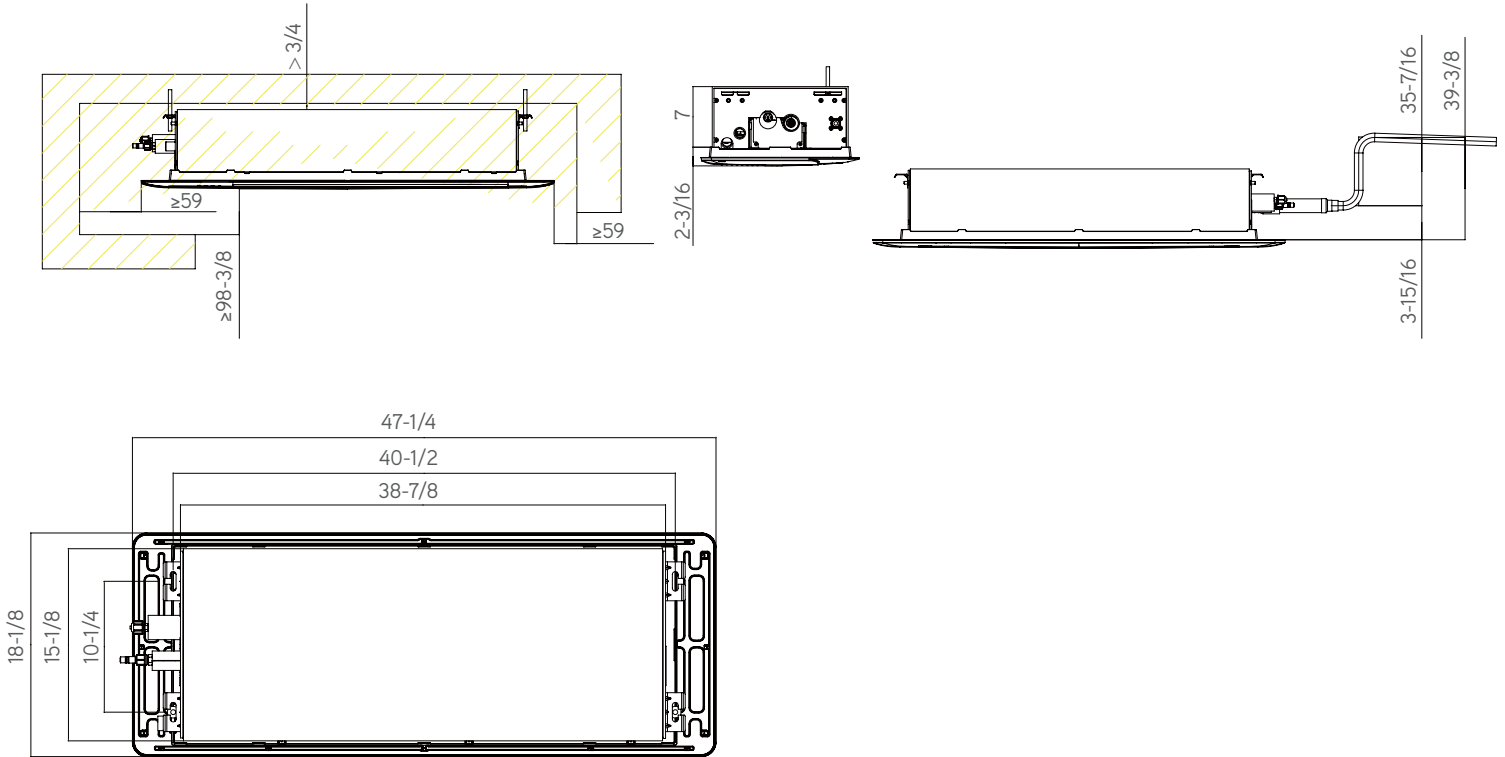

INDOOR UNIT

Minimum clearance

a	5-1/2
b	8-1/8
c	8-7/8

