

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SPECIFICATIONS

GMV-ND12TD/A-T(U)

SYSTEM PERFORMANCE		
Cooling	Nominal	Btu/h 12000
	Capacity @95°F	Btu/h
Heating	Nominal	Btu/h 13500
	Capacity @5°F	Btu/h
	Capacity @17°F	Btu/h
	Capacity @47°F	W
SEER2		
EER2		
HSPF2		
COP @5°F		
COP @47°F		
Cooling Temperature Range		°F
Heating Temperature Range		°F
Refrigerant Type		R410A
INDOOR UNIT GMV-ND12TD/A-T(U)		
Air flow (Min-Max)	CFM	247 - 353
Sound Pressure Level (Min - Max)	dB(A)	28 - 36
Condensate Drain Size (OD)	in	1
External Dimensions (WxHxD)	in	38-7/8 x 7 x 15-3/16
Package Dimension (W x H x D)	in	51-1/2 x 12-3/16 x 19-3/4
Net Weight	lbs	44
Gross Weight	lbs	60
CASSETTE GRILLE (REQUIRED) TD01		
Grille Dimension (W x H x D)	in	47-1/4 x 2-3/16 x 18-1/8
Package Dimension (W x H x D)	in	49-13/16 x 4-3/4 x 21-1/8
Weight (Net / Gross)	lbs	9.3 / 13.2
REFRIGERANT PIPING		
Line Set Sized by the Indoor Unit (Liquid - Gas)	in	1/4 - 1/2
ELECTRICAL		
Power Supply		208-230V / 1Ph / 60Hz
MCA	A	1
MOCP	A	15

System Performance Based on the Connected Outdoor Unit Performance

SYSTEM FEATURES	
Wired Controller Interface	Yes
WiFi Included	No
Easy Service Access	Yes
Indoor Fan Type	Crossflow
Multi Fan Speeds	3 Speeds
Indoor Unit Display	Yes
Auxiliary Electrical Heater	No
Ventilation (Outdoor Air)	No
REMOTE CONTROLLER FUNCTIONS	
Auto Mode	Yes
Auto Fan	Yes
Auto Swing (Horizontal Auto Swing)	No
Auto Swing - 180° (Vertical Auto Swing)	Yes
Clock	Yes
Dry Mode	Yes
Dry Anti-Mildew (X-Fan) Mode	Yes
Energy Saving Mode	Yes
Dirty Filter Alert	No
Fan Speed Control (7 Speeds)	Yes
I Feel Function	Yes
Privacy Lock	Yes
Quiet Mode	Yes
Room Temperature Display	No
Sleep Mode	Yes
3 Sleep Mode Options	Yes
Timer Mode	Yes
Turbo Mode	Yes
Display On/Off Control	Yes
Freeze Guard Mode	Yes
Power Failure Mode	Yes


DIMENSIONS & CLEARANCES

INDOOR UNIT

Unit: inch

GMV-ND12TD/A-T(U)

DIMENSIONS

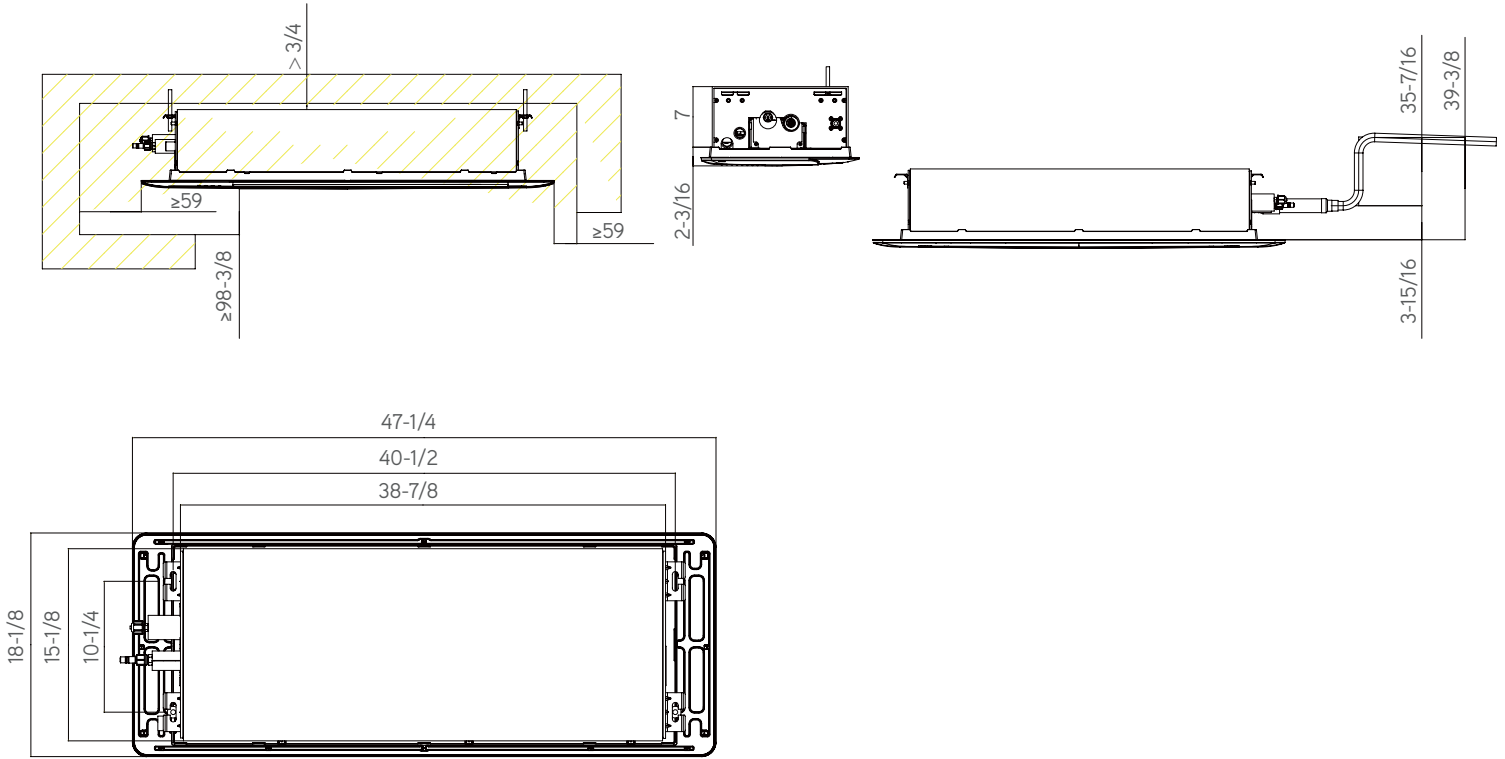

INDOOR UNIT

Minimum clearance

a	5-1/2
b	8-1/8
c	8-7/8

