



SUBMITTAL DATA

TM09D6CSI
9000 BTU/H Mini Console Heat Pump System

Job Name	Location	Date
Purchaser	Engineer	
Submmited to	For	
Unit Designation	Schedule No.	



YBE1FB5F



TM09D6CSI



XE72-44/E (Optional)

GENERAL FEATURES

- Quiet Operation and Multi-Speed Fan
 - 2-Way Discharge Air
 - Swing Louver Control
 - Multi-Directional Air Flow
- Wireless Remote with LCD Display Included
 - Optional XE72-44/E Wired Controller
 - Low Ambient Cooling and Heating
 - (Indoor and Outdoor) Copper Tube / Aluminum Fin
 - Blue Colored Fin - 500 Hrs Salt Spray Tested
 - New R32 Refrigerant with Refrigerant Sensor

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

INDOOR MODEL			TM09D6CSI
System Type			HEAT PUMP
SYSTEM PERFORMANCE			
Cooling	Min - Max	Btu/h	7,224 - 14,448
	Capacity @95°F	Btu/h	9,100
Heating	Min - Max	Btu/h	5,655 -13,600
	Capacity @47°F	Btu/h	10,500
	Capacity @17°F	Btu/h	6,600
	Capacity Max @5°F	Btu/h	8,700
SEER2			23.0
EER2			15.00
HSPF2			9.4
COP @5°F			1.75
Cooling Temperature Range		°F	-20 - 122
Heating Temperature Range		°F	-22 - 86
Refrigerant Type			R32
INDOOR UNIT			TM09D6CSI
Air flow (Min-Max)		CFM	188 - 383
Sound Pressure Level (Min - Max)		dB(A)	26 - 42
Dehumidification		pt/hr	1.69
External Dimensions (L x D x H)		in	27-9/16 x 8-15/32 x 23-5/8
Package Dimension (L x W x H)		in	31-1/32 x 11-9/64 x 27-7/16
Net Weight		lbs	33.1
Gross Weight		lbs	39.7
REFRIGERANT PIPING			
Refrigerant Charge - R410A		oz	30
Additional Charge		oz/ft	0.2
Line Set Sized by Indoor Unit (Liquid - Gas)		in	1/4 - 3/8
Line Set Size (Liquid - Gas) - Flared Connections		in	1/4 - 3/8
Pre-Charge Length		ft	25
Pipe Length (Min - Max)		ft	10 - 66
Max. Pipe Elevation		ft	40
ELECTRICAL			
Power Supply			208-230V / 1Ph / 60Hz (Powered by the Outdoor Unit)
Voltage Range (Min - Max)		VAC	187 - 253
Rated Current - Cooling		A	4.73
Rated Current - Heating		A	6
MCA		A	10
MOCP		A	15
Suggested Breaker Size		A	10
Main Power Wire Size		AWG	Per Local Code
Interconnecting Wire Size		AWG	14 / 4

FEATURES & FUNCTIONS SUMMARY

SYSTEM FEATURES

Inverter Type	G20 with Field Oriented control (FOC)
Ultra Low Frequency Torque Control	Yes
Power Factor Correction	Yes
Compressor Type - Inverter	High Efficiency Rotary
Basepan With Electric Heater	Yes
Indoor & Outdoor Fin Coating (Blue Fin)	Yes
Intelligent Defrosting	Yes
Intelligent Preheating	Yes
Low Voltage Startup	Yes
Memory/Power Failure Recovery	Yes
Self Diagnosis	Yes
Wired Controller Interface	Yes
WiFi Included	No
Indoor Fan Type	Centrifugal
Multi Fan Speeds	7 Speeds
Indoor Unit Display	No
Auxiliary Electrical Heater	No
Ventilation (Outdoor Air)	No

REMOTE CONTROLLER FUNCTIONS

Auto Mode	Yes
Auto Fan	Yes
Auto Swing (Horizontal Auto Swing)	No
Auto Swing - 180° (Vertical Auto Swing)	Yes
Clock	Yes
Dry Mode	Yes
Dry Anti-Mildew (X-Fan) Mode	Yes
Energy Saving Mode	Yes
Dirty Filter Alert	No
Fan Speed Control (7 Speeds)	Yes
I Feel Function	Yes
Privacy Lock	Yes
Quiet Mode	Yes
Room Temperature Display	No
Sleep Mode	Yes
3 Sleep Mode Options	Yes
Timer Mode	Yes
Turbo Mode	Yes
Display On/Off Control	Yes
Freeze Guard Mode	Yes
Power Failure Mode	Yes

NOTE:


Please check the Multi-zone submittals for Non-Ducted or Mixed Performance table.

DIMENSIONS

INDOOR UNIT

Unit: inch

TM09D6CSI
DIMENSIONS

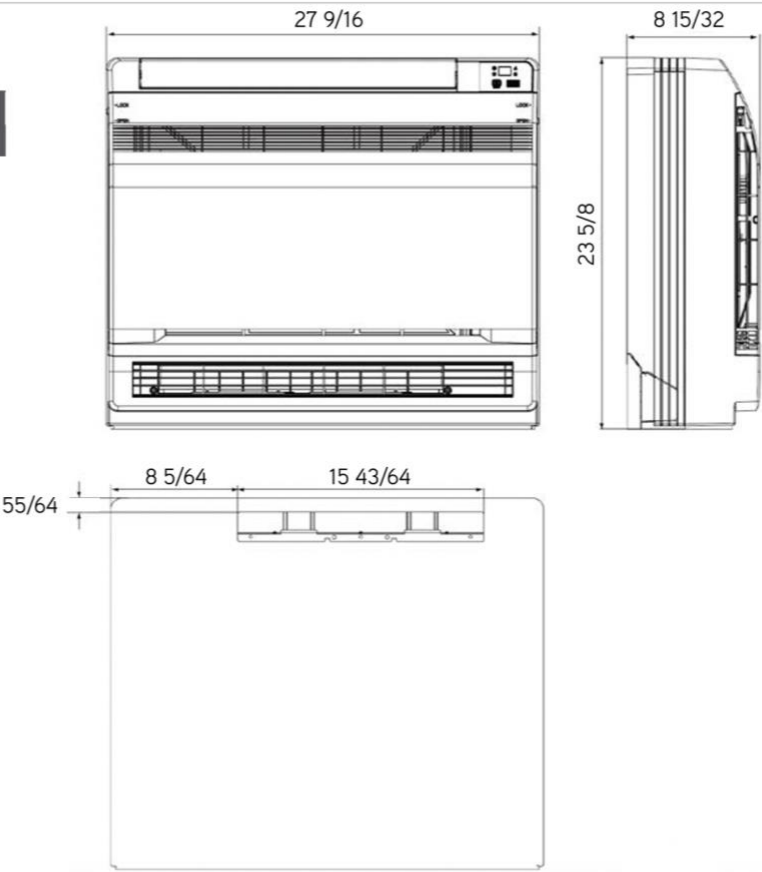

CLEARANCES

INDOOR UNIT

Minimum clearance

DIMENSIONS	
A	2-3/4
B	2
C	39

Unit: inch

