



## SUBMITTAL DATA

TM24D6ECI  
24000 BTU/H Cassette Heat Pump System

Job Name	Location	Date
Purchaser	Engineer	
Submmited to	For	
Unit Designation	Schedule No.	



YBE1FB5F



TM24D6ECI



XE72-44/E

### GENERAL FEATURES

- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- 4 - Way Discharge Air
- Swing Louver Control
- Internal Condensate Drain Pump
- Wireless Remote with LCD Display Included
- XE72-44/E Wired Controller Included
- Low Ambient Cooling and Heating
- (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested
- New R32 Refrigerant with Refrigerant Sensor

## SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

INDOOR MODEL			TM24D6ECI
System Type			HEAT PUMP
SYSTEM PERFORMANCE			
Cooling	Min - Max	Btu/h	3,600 - 26,500
	Capacity @95°F	Btu/h	22,000
	Min - Max	Btu/h	4,000 - 33,000
Heating	Capacity @47°F	Btu/h	24,000
	Capacity @17°F	Btu/h	15,600
	Capacity Max @5°F	Btu/h	16,800
SEER2			22.5
EER2			11.6
HSPF2			9.0
COP @5°F			1.80
Cooling Temperature Range		°F	-20 - 122
Heating Temperature Range		°F	-22 - 86
Refrigerant Type			R32
INDOOR UNIT			TM24D6ECI
Air flow (Min-Max)		CFM	440 - 560
Sound Pressure Level (Min - Max)		dB(A)	39 - 45
Dehumidification		pt/hr	5.28
External Dimensions (L x D x H)		in	33-5/64 × 33-5/64 × 9-29/64
Package Dimension (L x W x H)		in	37-29/32 × 37-29/32 × 12-51/64
Net Weight		lbs	63.9
Gross Weight		lbs	83.8
CASSETTE GRILLE (REQUIRED)			TF06
Grille Dimension (L x D x H)		in	37-13/32 × 37-13/32 × 2-3/64
Package Dimension (L x W x H)		in	40-43/64 × 40-55/64 × 4-13/32
Weight (Net / Gross)		lbs	13.23 / 20.948
REFRIGERANT PIPING			
Refrigerant Charge - R410A		oz	423
Additional Charge		oz/ft	0.4
Line Set Sized by Indoor Unit (Liquid - Gas)		in	1/4 - 5/8
Line Set Size (Liquid - Gas) - Flared Connections		in	1/4 - 5/8
Pre-Charge Length		ft	25
Pipe Length (Min - Max)		ft	10 - 131
Max. Pipe Elevation		ft	82
ELECTRICAL			
Power Supply			208-230V / 1Ph / 60Hz (Powered by the Outdoor Unit)
Voltage Range (Min - Max)		VAC	187 - 253
Rated Current - Cooling		A	13
Rated Current - Heating		A	15.5
MCA		A	22
MOCP		A	30
Suggested Breaker Size		A	25
Main Power Wire Size		AWG	Per Local Code
Interconnecting Wire Size		AWG	14 / 4

## FEATURES & FUNCTIONS SUMMARY

### SYSTEM FEATURES

Inverter Type	G20 with Field Oriented control (FOC)
Ultra Low Frequency Torque Control	Yes
Power Factor Correction	Yes
Compressor Type - Inverter	High Efficiency Rotary
Basepan With Electric Heater	Yes
Indoor & Outdoor Fin Coating (Blue Fin)	Yes
Intelligent Defrosting	Yes
Intelligent Preheating	Yes
Low Voltage Startup	Yes
Memory/Power Failure Recovery	Yes
Self Diagnosis	Yes
Wired Controller Interface	Yes
WiFi Included	No
Indoor Fan Type	Centrifugal
Multi Fan Speeds	4 Speeds
Indoor Unit Display	Yes
Auxiliary Electrical Heater	No
Ventilation (Outdoor Air)	Yes

### REMOTE CONTROLLER FUNCTIONS

Auto Mode	Yes
Auto Fan	Yes
Auto Swing (Horizontal Auto Swing)	No
Auto Swing - 180° (Vertical Auto Swing)	Yes
Clock	Yes
Dry Mode	Yes
Dry Anti-Mildew (X-Fan) Mode	Yes
Energy Saving Mode	Yes
Dirty Filter Alert	No
Fan Speed Control (7 Speeds)	Yes
I Feel Function	Yes
Privacy Lock	Yes
Quiet Mode	Yes
Room Temperature Display	No
Sleep Mode	Yes
3 Sleep Mode Options	Yes
Timer Mode	Yes
Turbo Mode	Yes
Display On/Off Control	Yes
Freeze Guard Mode	Yes
Power Failure Mode	Yes

### NOTE:


Please check the Multi-zone submittals for Non-Ducted or Mixed Performance table.

DIMENSIONS

INDOOR UNIT

Unit: inch

TM24D6ECI	
DIMENSIONS	
A	37 13/32
B	34 1/4
C	33 5/64
D	26 49/64
E	30 45/64
F	9 29/64
G	5 5/16

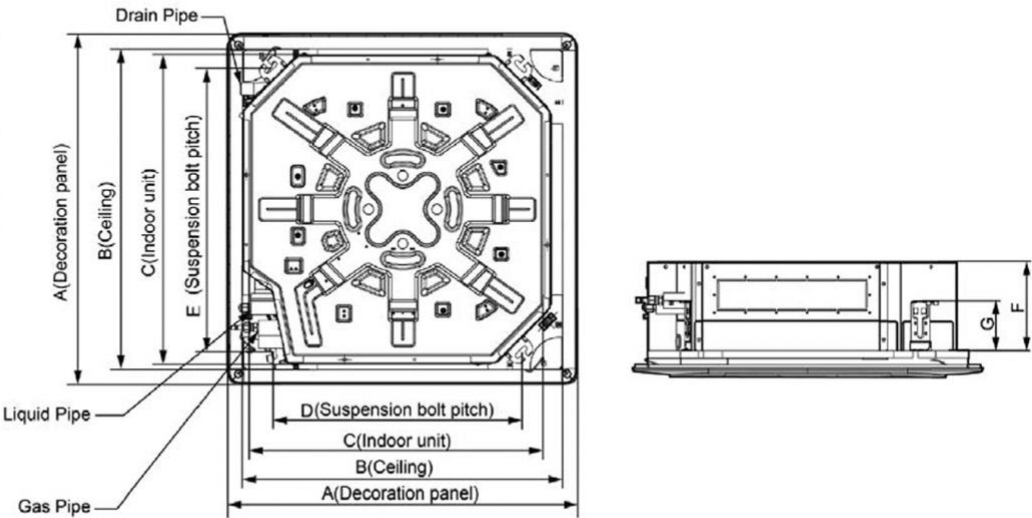

CLEARANCES

INDOOR UNIT

Minimum clearence

